



# WARN® ZEON™ 10-S Winch

Truck/SUV winch equipped with Spydura™ synthetic rope and a 10,000 lb. capacity.

The next generation of winches is here: WARN® ZEON™. With a modern yet rugged design, upgraded internal components, and increased performance and durability, ZEON is a new name from the most trusted name in winches. With a bold look and power to match, the ZEON is like nothing you've ever seen before. Backed by the WARN Limited Lifetime Warranty (North America).

- Legendary WARN reliability and performance; 10,000 lb. (4536 kg) capacity – perfect for heavier trucks and SUVs
- Unique exterior styling and symmetrical design give this winch a look that is advanced, capable, and strong
- New-design planetary gear train and series-wound motor deliver fast, quiet, and reliable pulling power
- Flat black powder-coated finish with stainless steel fasteners and clutch lever looks great and inhibits corrosion
- Convertible control pack can be attached to the winch or remotely mounted, allowing for various winch mounting options and looks (Relocation kit required and sold separately)
- Aluminum winch drum reduces rope wear, is light weight, and has an integrated rope anchor for easy rope installation
- Robust aluminum structure is durable and helps dissipate heat
- Improved winch sealing to keep the elements out. IP68 rated
- Contactor control for extreme reliability and weather resistance
- Automatic mechanical cone brake holds the full rated load and offers excellent control while winching
- Ultra-durable rubberized corded remote with 12' lead
- Includes 100' of 3/8" WARN Spydura™ synthetic rope, a temperature-resistant sleeve on the first layer, a ballistic nylon sliding sleeve for abrasion resistance, and a polished aluminum hawse fairlead.
- Backed by the WARN Limited Lifetime Warranty

PN 89611



**Satin-black powder-coated finish**  
The black look that attracts compliments while it resists corrosion.

**Convertible control pack**  
Lets you mount the control pack separately from the winch, or keep it attached for an integrated look. Your choice.

**Contactors control**  
Another piece in the durability and reliability puzzle: Built to weather the storm for the long run.

**Fast line speed, low amp draw.**  
Maximize your winch line speed while you minimize the strain on your charging system.

**New motor and motor housing**  
Hello extra power and durability; goodbye loud noise and exposed wires.

**Fewer leak paths, Improved sealing**  
Keeps the water, muck, slop and crud, out of your winch. IP-68 rated.



**New three-stage planetary gear train**  
It's about as fast and reliable as a gear train gets. Plus a new ergonomic easy-throw clutch lever.

**Stainless steel hardware**  
Corrosion resistance runs deep in this winch construction.

**Automatic mechanical brake**  
Powerful brake holds the full-rated load and provides great control while winching.

**New aluminum drum design**  
Large diameter for less wear on the winch rope. Includes an exclusive rope anchor point for easy winch rope replacement.

**Carrying on the WARN legend and Limited Lifetime Warranty**  
ZEON has a limited lifetime warranty on mechanical parts, and a one-year warranty on electrical components. This is all backed by a global service network, and a WARN name that's solid as rock.

## SPECIFICATIONS

**Winch model:** WARN ZEON 10-S

**Part numbers:** 89611

**Rated line pull:** 10,000 lbs. (4536 kgs)

**Motor:** 12V DC, Series Wound

**Electrical controls:** Solenoid

**Remote Control:** Remote switch, 12' (3.7m) Lead

**Geartrain:** 3-Stage Planetary

**Gear ratio:** 216:1

**Clutch (freespooling):** Sliding Ring Gear

**Brake:** Automatic Direct Drive Cone

**Drum diameter/Length:** 2.5"/9.0" (6.4cm/23cm)

**Weight (kit shipping):** 80 lbs. (36.3 kgs)

**Wire rope:** 3/8" x 100' (9.5mm x 30.5m)

**Fairlead:** Roller

**Recommended Battery:** 650 CCA minimum for winching


**Battery leads:** 2 gauge, 72" (1.83m)

**Finish:** Powder coat over primer undercoating

**Warranty:** Limited Lifetime

### 12V DC performance specs (first layer of drum)

Line Pull Lbs. (Kgs. )	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs (Kgs.)
0	33.7 (10.3)	62 amps	1/8000 (3629)
2000 (910)	14.9 (4.5)	144 amps	2/7280 (3302)
4000 (1810)	11.2 (3.4)	215 amps	3/6670 (3026)
6000 (2720)	8.5 (2.6)	280 amps	4/6230 (2826)
8000 (3630)	6.5 (1.9)	343 amps	
10000 (4536)	4.8 (1.5)	409 amps	

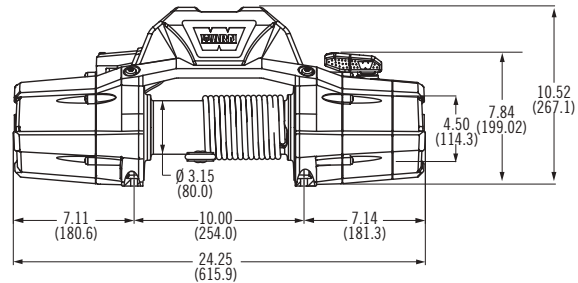

### Winch dimensions:

24.25" L x 6.09" D x 7.15" H  
(615.9mm L x 154.6mm D x 181.6mm H)

### Mounting bolt pattern:

10.0" x 4.5" (254mm x 114.3mm)

**Warn Industries, Inc.**  
12900 S.E. Capps Road,  
Clackamas, OR USA 97015-8903



**Customer Service (North America):**  
1-800-543-9276

**International Sales Support:**  
+1 503 722 1200

[www.warn.com](http://www.warn.com)