



EVO

ALL NEW

A LITTLE COLOR GOES THE LONG WAY.

The new WARN EVO combines proven pulling power, rugged durability and dependable performance in a winch built to reliably recover in all conditions. Now, you can make it every bit as distinctive as the rig it's mounted on.

UNMISTAKINGLY WARN, UNMISTAKABLY YOURS.

Every build tells a story—and EVO is there to make it uniquely yours. The new EVO comes out of the box black, but now you can customize your look with interchangeable, powder-coated armor available in multiple colors. With just a few wrenches you can easily swap the armor, tie plate and WARN badging to match your off-roading style and make it pop.

And if you need a tighter or hidden install the armor can be removed completely for a clean, low-profile fit.



Now you can customize your look with interchangeable, powder-coated armor available in multiple colors.



112876 EVO Red Color Kit
112877 EVO Gray Color Kit
112878 EVO Yellow Color Kit
112879 EVO Green Color Kit
112880 EVO Blue Color Kit
112970 WARN Color Decals



NEW BRIGHT COLORS, SAME LEADING PERFORMANCE.

A custom look means nothing without the strength and dependability to back it up. That's why the EVO was designed, engineered and brutally tested by WARN.

Its rugged all-metal geartrain, die-cast aluminum outer armor and one-piece tie plate are built to handle years and years of hard use. A sealed Albright® contactor provides reliable power control through heavy pulls and repeated recoveries, while an improved rope anchor and integrated heat sleeve on synthetic models add durability where it counts.



CONTROL WITHOUT COMPROMISE.

Every recovery is different. That's why the new EVO includes a versatile dual-mode remote that lets you operate the winch directly or wirelessly. Stay connected with a 10-foot cord or move freely with up to 50 feet of wireless range.



Need a replacement remote down the road? Pair a new EVO remote to your existing control pack and get back to work.



READY FOR ALL CONDITIONS.

When the trails get sloppy, the new EVO is right at home. IP68-rated sealing helps keep water, mud and debris out, while a durable, powder-coated finish helps preserve its color and finish season after season.

WHEN YOU GO WITH WARN, YOU GO PREPARED.

For more than 75 years, WARN has been designing recovery equipment people depend on when the trail gets difficult. That experience is built into every EVO and backed by an industry-leading warranty: lifetime mechanical and seven-year electrical coverage.

And if you ever need parts, service or support, our factory-based customer service team and extensive line of replacement parts and accessories make it easy to keep your EVO performing for years to come.

CHOOSE THE CONFIGURATION THAT'S RIGHT FOR YOU.



110180 EVO 8-S 8,000 lbs. single-line pulling capacity. Equipped with 90' of 3/8" synthetic rope, hawse fairlead, and 2-in-1 wired/wireless remote

110200 EVO 10-S 10,000 lbs. single-line pulling capacity. Equipped with 90' of 3/8" synthetic rope, hawse fairlead, and 2-in-1 wired/wireless remote

110220 EVO 12-S 12,000 lbs. single-line pulling capacity. Equipped with 90' of 3/8" synthetic rope, hawse fairlead, and 2-in-1 wired/wireless remote

---



110185 EVO 8 8,000 lbs. single-line pulling capacity. Equipped with 90' of 5/16" steel rope, roller fairlead, and 2-in-1 wired/wireless remote

110205 EVO 10 10,000 lbs. single-line pulling capacity. Equipped with 90' of 3/8" steel rope, roller fairlead, and 2-in-1 wired/wireless remote

110225 EVO 12 12,000 lbs. single-line pulling capacity. Equipped with 85' of 3/8" steel rope, roller fairlead, and 2-in-1 wired/wireless remote




EVO is available in capacities ranging from 8,000 to 12,000 lbs., plus your choice of steel or synthetic rope.

EVO SPECIFICATIONS

	EVO 8 / 8-S	EVO 10 / 10-S	EVO 12 / 12-S
Part numbers:	EVO 8 - 110185 EVO 8-S - 110180	EVO 10 - 110205 EVO 10-S - 110200	EVO 12 - 110225 EVO 12-S - 110220
Rated line pull:	8,000 lbs. (3628 kg) single-line	10,000 lbs. (4536 kg) single-line	12,000 lbs. (5443 kg) single-line
No load line speed:	19 ft/min (5.8 m/min)	19 ft/min (5.8 m/min)	19 ft/min (5.8 m/min)
Rated load line speed:	4 ft/min (1.2 m/min)	4 ft/min (1.2 m/min)	2 ft/min (0.6 m/min)
No load motor current:	78 Amps	83 Amps	74 Amps
Rated load motor current:	385 Amps	460 Amps	526 Amps
Motor:	12V DC, series wound		
Electrical controls:	Albright contactor		
Wiring:	Traditional motor terminals		
Corrosion resistance:	240 hour salt spray		
Ingress protection:	Entire winch unit is rated IP68 waterproof, for submersible operation		
Remote Control:	2-in-1 wired/wireless remote		
Geartrain:	3-stage planetary		
Gear ratio:	218:1	218:1	234:1
Clutch (freespooling):	Manual lever operation		
Brake:	Load-holding spring		
Drum diameter/Length:	2.5"/9.0" (6.73cm/23cm)		
Rope:	**EVO 8: Steel:** 5/16" x 90' (8mm x 27.4m), **Synthetic:** 3/8" x 90' (9.5mm x 27.4m) **EVO 10: Steel:** .354" x 90' (9mm x 27.4m), **Synthetic:** 3/8" x 90' (9.5mm x 27.4m) **EVO 12: Steel:** 3/8"x 85' (9.5mm x 25.9m), **Synthetic:** 3/8"x 90' (9.5mm x 27.4m)		
Fairlead:	**EVO 8, 10, 12:** Roller, **EVO 8-S, 10-S, 12-S:** powder coated black aluminum hawse		
Recommended Battery:	650 CCA minimum for winching		
Battery leads:	6.5' (2m) of 25mm power cabling		
Finish:	Powder coating over primer undercoating		
Weight:	**EVO 8:** 65lbs (29.5 kg), **EVO 8-S:** 54lbs (24.3 kg), **EVO 10:** 68lbs (31.0 kg), **EVO 10-S:** 54lbs (24.3 kg), **EVO 12:** 69lbs (31.3 kg), **EVO 12-S:** 54lbs (24.3 kg)		
Final point of assembly:	China		
Warranty:	Limited lifetime mechanical, 7 years electrical		

EVO DIMENSIONS

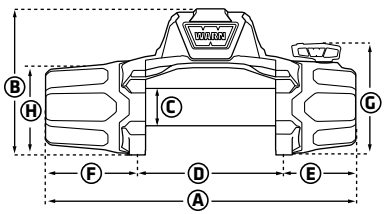

Ⓐ 21.0" (535mm)	Ⓔ 4.86" (123mm)
Ⓑ 9.86" (250mm)	Ⓕ 6.20" (157mm)
Ⓒ 2.52" (64mm)	Ⓖ 7.53" (191mm)
Ⓓ 10.0" (254mm)	Ⓗ 6.39" (162mm)

Mounting bolt pattern: 10.0" x 4.5" (254mm x 114mm)

WARN INDUSTRIES, INC.
12900 S.E. CAPPS ROAD
CLACKAMAS, OR USA 97015-8903
CUSTOMER SERVICE: 800-543-9276
www.warn.com